


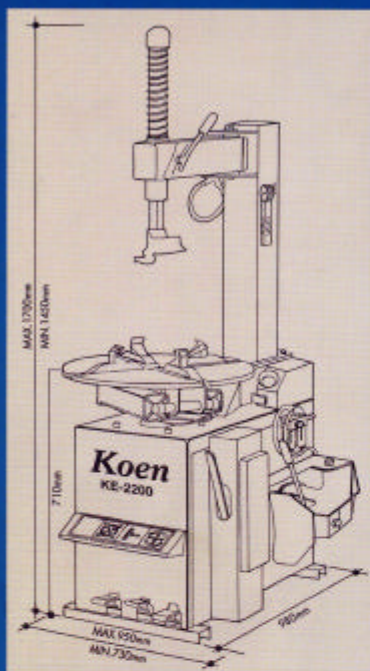


# TIRE CHANGER



 **Koeng** CO., LTD.

# Tire Changer



**N**ew locking system of the operation arms avoids any clearance and makes the machine stiff in the years.

## New Tool

The improved shape reduces drastically the friction between the tool and the bead, and make it impossible to damage the tire.

**B**ead breaker with 3 support points allows perfect stability of the wheel.

Operated by a 3 tons cylinder handless all up to 13" wide.

**N**ew self-centering chuck clamps from outside till 18" including light alloy rims and 17.5" light truck wheel.

## Specifications

- Rim diam. (outside locking) : 10"~18"
- Rim diam. (inside locking) : 12"~20"
- Bead removing tool force : lbs 3300(1500kg)
- Motor : 3ph 0.75 kw (1HP)  
1ph 1.10 kw (1.5HP)
- Max. torque : ft × lb 918 (125 kgm)
- Weight : lbs 445 (kg 202)
- Air pressure : 120~175 psi (8~12 bar)
- Length : min 39" (990 mm), max 62" (1575 mm)
- width : min 29" (750 mm), max 38" (960 mm)
- Height : min 58" (1480 mm), max 67" (1710 mm)



**KE** **Koeng CO., LTD.**

E-mail : [export@koeng.com](mailto:export@koeng.com)

B 806,345-9, Gasan Dong, Kumcheon Gu, Seoul, Korea

Tel : +82 2 6292 6300

Fax: +82 2 6292 6292

+82 2 839 4700